


BH-2540 JIB CRANE

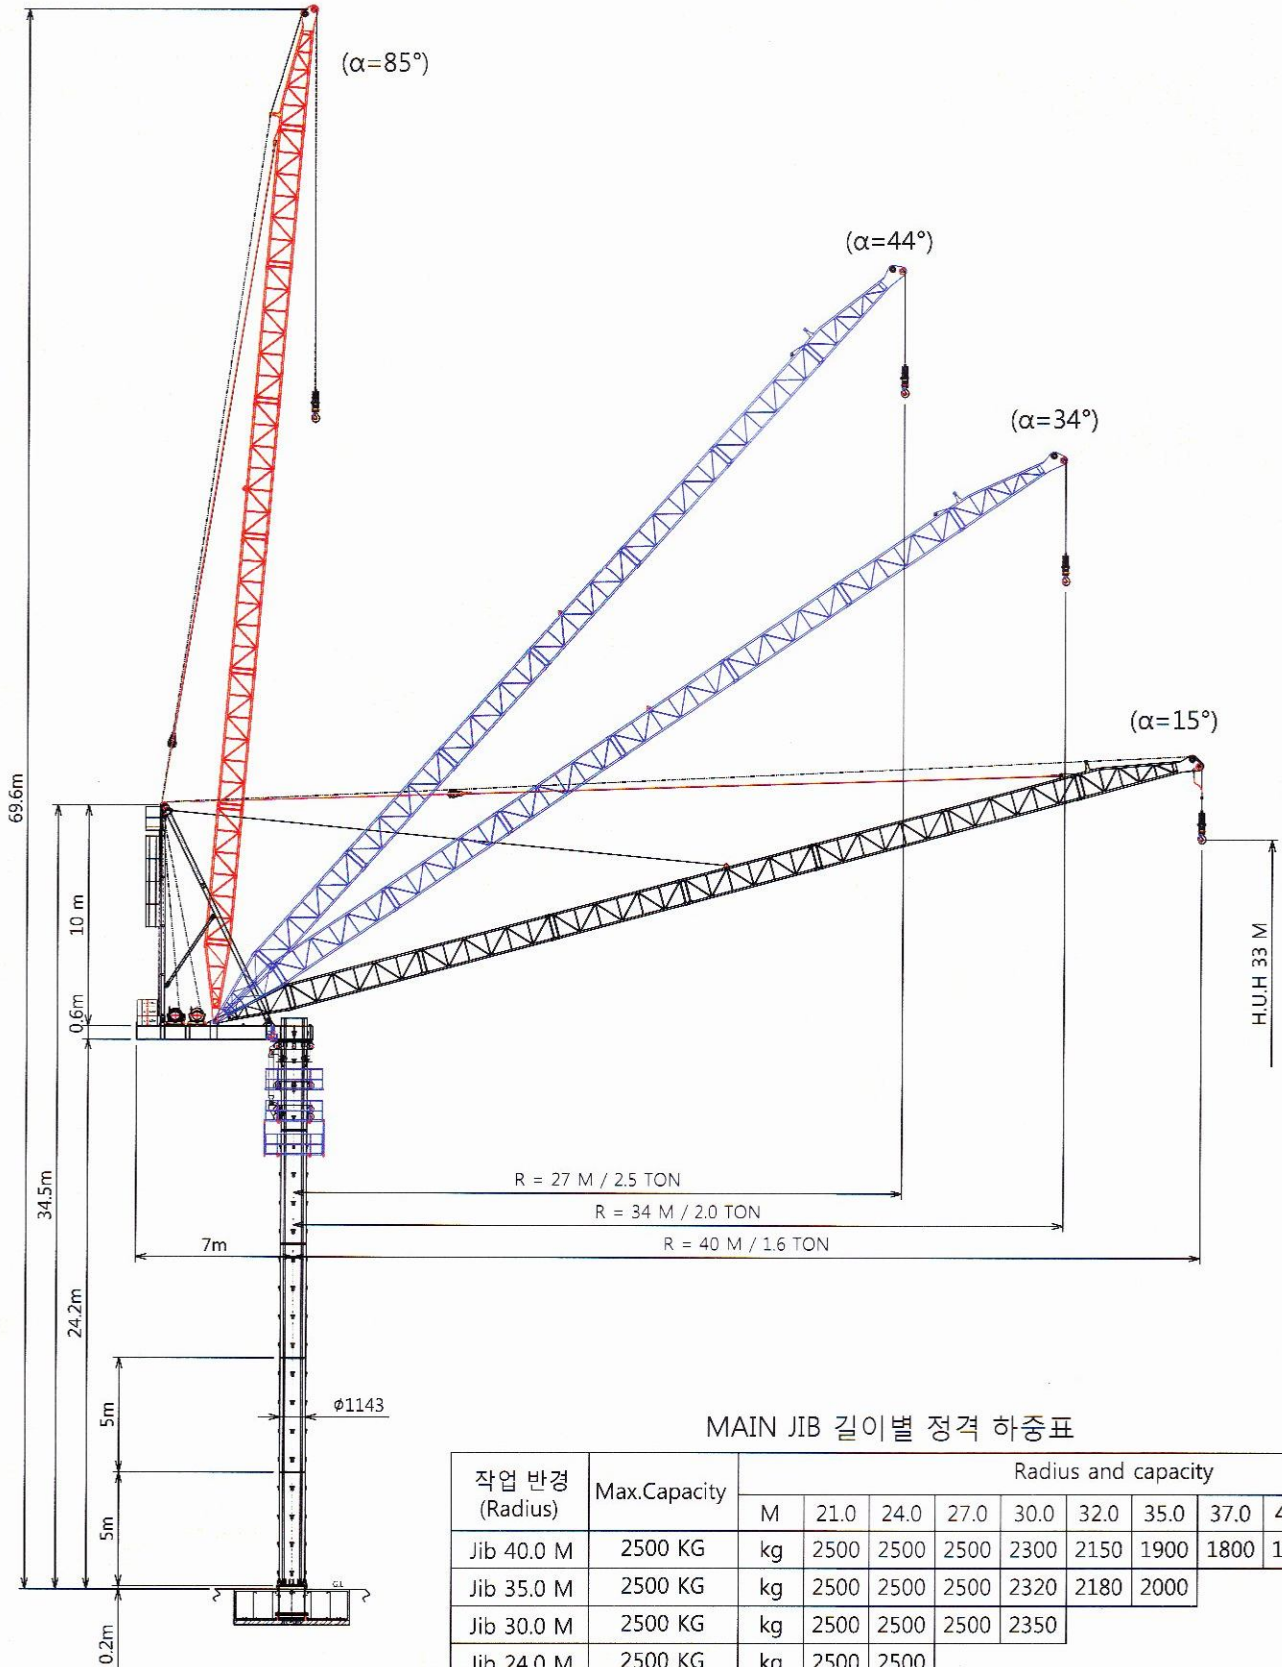

MAIN JIB 길이별 정격 하중표

작업 반경 (Radius)	Max.Capacity	Radius and capacity								
		M	21.0	24.0	27.0	30.0	32.0	35.0	37.0	40.0
Jib 40.0 M	2500 KG	kg	2500	2500	2500	2300	2150	1900	1800	1600
Jib 35.0 M	2500 KG	kg	2500	2500	2500	2320	2180	2000		
Jib 30.0 M	2500 KG	kg	2500	2500	2500	2350				
Jib 24.0 M	2500 KG	kg	2500	2500						

BH-2540 TECHNICAL DATA

MAIN JIB 길이별 정격 하중표

작업반경 (Radius)	Max Capacity	Radius and Capacity								
		M	21.0	24.0	27.0	30.0	32.0	35.0	37.0	40.0
40 M	2500 KG	KG	2900	2900	2500	2300	2150	1900	1800	1600
35 M	2500 KG	KG	2500	2500	2500	2320	2180	2000		
30 M	2500 KG	KG	2500	2500	2500	2350				
24 M	2500 KG	KG	2500	2500						

	Ton	m/min	KW	WIRE ROPE
Hoist	2.5	26	15	200mØ 15
	1.3	50		
러핑	15° ~ 85° / 2분 10초		15	200mØ 15
슬로잉		0.8	3.75	
사용전압	380V		25 SQ 3P	최대설치높이 100M