



Dimensions

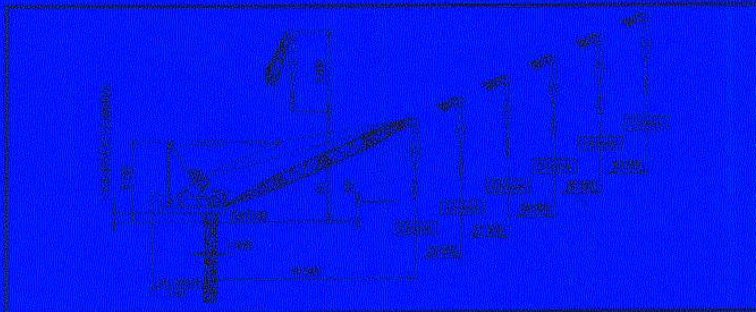

Always consult the manufacturer for dimensions of the equipment used. The weight of the equipment should be added to the total weight of the tower. The tower should be installed on a level surface. The tower should be installed on a level surface.

General Dimension	mm	inches
Maximum clear height (to top of tower)	10000	328.1
Maximum clear height (to top of tower)	10000	328.1
Maximum clear height (to top of tower)	10000	328.1
Maximum clear height (to top of tower)	10000	328.1
Maximum clear height (to top of tower)	10000	328.1
Maximum clear height (to top of tower)	10000	328.1
Maximum clear height (to top of tower)	10000	328.1
Maximum clear height (to top of tower)	10000	328.1
Maximum clear height (to top of tower)	10000	328.1
Maximum clear height (to top of tower)	10000	328.1

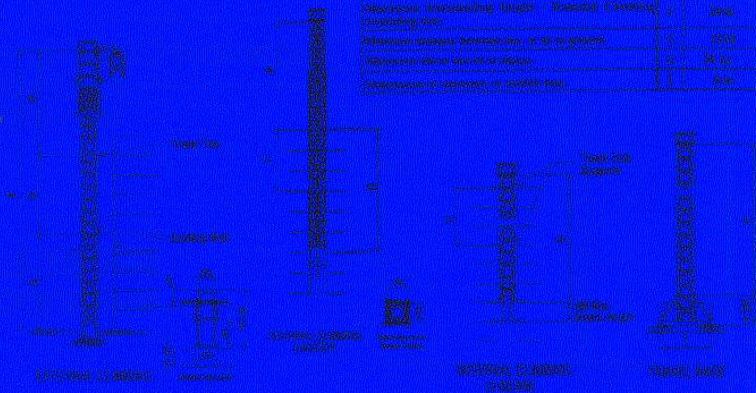

Radius & Capacity

Tower Length	Wire Radius	Wire Radius at Base	Interval of Spacing	Radius & Capacity (Towers)															
				At Tower B, J Tower Diameter & J-Pull Sheets															
100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100		
100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100		
100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100		
100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100		
100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100		

Capacity values are for the maximum of 40% and 50% respectively of A & B tower length. It is not possible to install the tower on a level surface.

Speeds

Always consult the manufacturer for details on tower speed.

